

FILTER BAGS



- Felt media available from 1 to 200 microns
- Mesh media available from 45 to 1000 microns
- Low maintenance costs and quick changeout

domnick hunter Technologies range of filter bags are manufactured from a variety of filter media each specifically chosen for its compatibility with a wide range of process liquids. FDA approved materials can be offered for food and pharmaceutical processes. Typical applications include paints, pigments, laquers, varnishes, inks, waxes, coolants, cutting oils, food products, petroleum products and general process waters. They are particularly effective in high viscosity applications (up to 4000 cps).

The filtration mechanism employed within filter bags allows high flow rates and high dirt holding capacity, this combined with low maintenance costs and quick change out makes bag filtration an extremely cost effective means of liquid clarification. Bags are available to suit most common filter housings, a custom design service is also offered. domnick hunter Technologies also supply a full range of filter housings in stainless steel and polypropylene suitable for bag and cartridge applications. Special and coded units can also be manufactured.

Technical Specifications

Materials of Construction

Filtration Media	:	Polypropylene felt Viscose felt Nylon felt Polyester felt Nomex* felt Nylon Mesh
Ring	:	Electro plated steel Stainless steel Moulded polypropylene Polypropylene

*Nomex is a registered trademark of E.I. du Pont de Nemours and Co Inc.

Food and Biological

Materials conform to the relevant requirements of 21 CFR Part 17


Viscous Flow Correction Factors

Viscous Flow Correction Factors													
Fluid viscosity (cps)	10000	8000	6000	4000	2000	1500	1000	800	600	400	200	100	1
Flow rate (% Water)	2.1	2.6	3.5	5	8	11	16	17	25	35	58	58	100


Compatibility

Material	Max °C Temp	Compatibility							Resistance to micro-organisms
		Organic Solvents	Oils and Fats	Alkalies	Organic Acids	Mineral Acids	Oxidising Agents		
Polypropylene	95	Good	V. Good	Good	V. Good	Good	Fair	Fair	
Viscose	121	V. Good	V. Good	Good	Good	Poor	Fair	Fair	
Polyester	150	V. Good	V. Good	Good	Good	Good	Good	Good	
Nylon	135	V. Good	V. Good	Good	Fair	Poor	Poor	Poor	
Nomex	220	V. Good	V. Good	Good	Fair	Fair	Poor	Poor	

Filter Bag Flow Rates

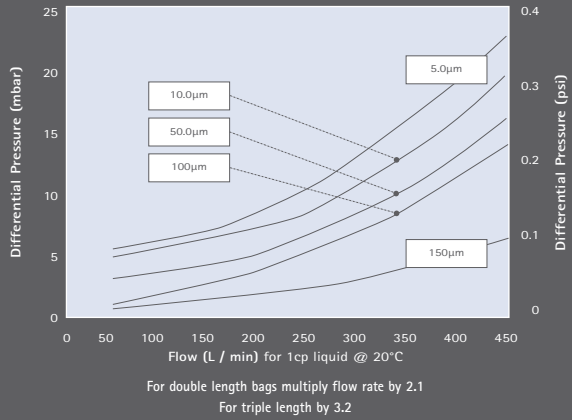

Filter Bag

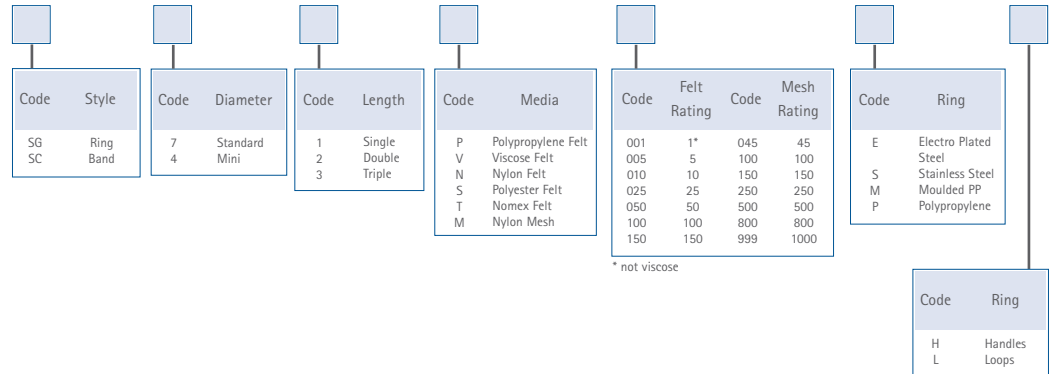

Orgreave Lane, Handsworth, Sheffield, England S13 9NZ
Tel: +44 (0)114 269 3999 • Fax: +44 (0)114 269 1409

Copyright **dornick hunter limited** 2006
Publication Reference: PD07/06 Rev 1A

dornick hunter limited has a continuous policy of product development and although the Company reserves the right to change specification, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.